




Designed for use on aerial lift bucket trucks made by:

MBI Monzon Brothers, Inc


PLASTIC TECHNIQUES, INC.

MBI Crane & Hoist
Material Handling Products and Services

HOLAN

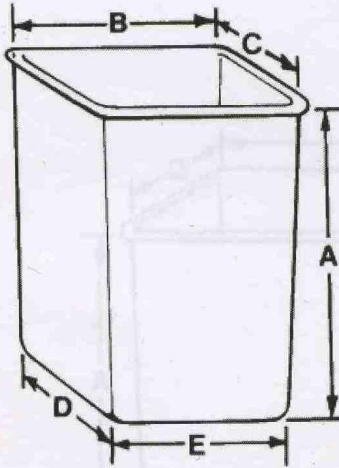

A is measured from the bottom of the rim to the base of the insert.
B & C measurements are taken one inch down from beneath the lip, on the outside of the insert.

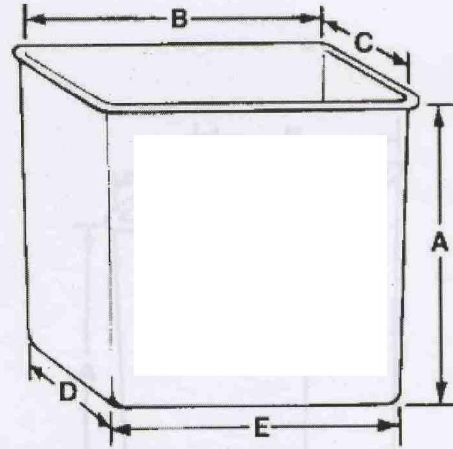

D & E measurements are taken three inches up from the bottom, on the outside of the insert. This eliminates distortion due to the radius of the corners.

NOTE: All dimensions shown in chart below refer to the OUTSIDE of the insert, or INSIDE of the bucket. All measurements are rounded to the nearest half-inch.

ELECTRICAL INSULATING BUCKET INSERT SPECIFICATIONS

PTI MODEL#	MFG'S CODE	SHAPE	DIMENSIONS IN INCHES					NO. PER BOX	PTI ACCESSORY ITEMS		
			A	B	C	D	E		LIDS	SCUFF PADS	SCUFF PADS W/ STEP
H-18*	See Below	Square	38.5	22.5	22.5	21	21	2	FITALL-I	D-20	DS-20
H-28	8007-23	Square	38.5	23	23	22	22	2	2L28	D-21	DS-5
H-30	8007-50	Rect.	40	28.5	22.5	21	27	2	28L32	D-26	DS-8/DS-8A
H-30S	HOLAN	Rect.	40	28.5	22.5	21	27	2	28L32	D-26-N	
H-38	8007-38	Square	38	24	24	23	23	3	2L28	D-22	DS-17
H-39	8007-39	Square	39	24	24	23	23	2	2L28	D-22	DS-18
H-42	8007-42	Square	42	24	24	21	21	4	2L28	D-20	DS-1
H-42S	8007-42	Square	42	24	24	21	21	4	2L28	D-20-N	DS-1
H-50	8007-48	Rect.	42	47	23	21	45	1	RA50	D-46	DS-12/DS-12A
H-88	8007-45	Rect.	41	28	22	21	27	2	28L32/5F30	D-28	DS-8/DS-8A
H-88S	HOLAN	Rect.	41	28	22	21	27	2	28L32/5F30	D-28-N	DS-8

*The H-18 HOLAN Insert is an undersized H-28 style intended to fit older repaired buckets or undersized buckets which may still be in use. It is advisable to check dimensions before ordering this insert style.

S = Insert with Molded Step

FORM #1003-C HOLAN Rev.F 9/09
Copyright 2009