





Designed for use on aerial lift bucket trucks made by:

MBI Monzon Brothers, Inc

PLASTIC TECHNIQUES, INC.

MBI Crane & Hoist
Material Handling Products and Services

LIFT - ALL

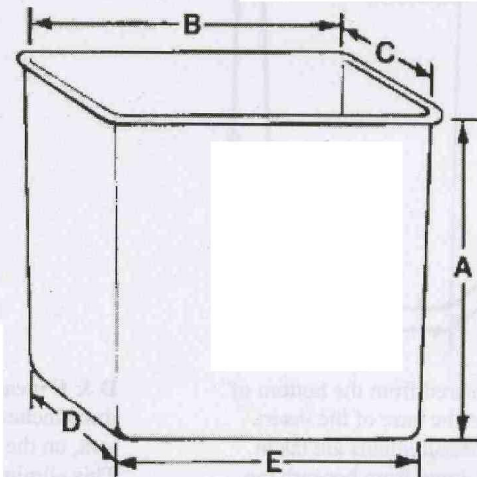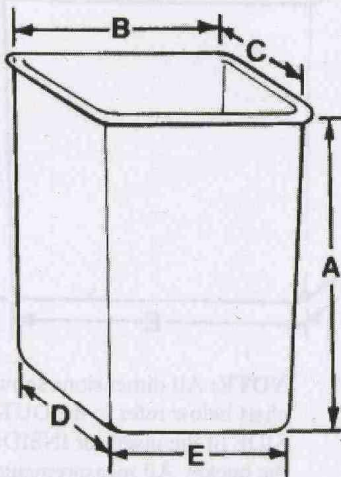

A is measured from the bottom of the rim to the base of the insert.
B & C measurements are taken one inch down from beneath the lip, on the outside of the insert.

D & E measurements are taken three inches up from the bottom, on the outside of the insert. This eliminates distortion due to the radius of the corners.

NOTE: All dimensions shown in chart below refer to the OUTSIDE of the insert, or INSIDE of the bucket. All measurements are rounded to the nearest half-inch.

ELECTRICAL INSULATING BUCKET INSERT SPECIFICATIONS

PTI MODEL#	MFG'S CODE	SHAPE	DIMENSIONS IN INCHES					NO. PER BOX	PTI ACCESSORY ITEMS		
			A	B	C	D	E		LIDS	SCUFF PADS	SCUFF PADS W/ STEP
L-41	Lift-All	Square	42	24	24	21	21	4	2L28	D-20	DS-1
L-41S	Lift-All	Square	42	24	24	21	21	4	2L28	D-20-N	DS-1
LA-46	Lift-All	Rect.	41	46	22	21	45	1	*	D-46	DS-11/DS-11A
LA-46S	Lift-All	Rect.	41	46	22	21	45	1	*	D-46-N	DS-11
LA-28	Lift-All	Rect.	41	28	22	21	27	2	28L32/5F30	D-28	DS-8/DS-8A
LA-28S	Lift-All	Rect.	41	28	22	21	27	2	28L32/5F30	D-28-N	DS-8

* Choose 5A48, 5F48, or 5TD48 Configuration, please see catalog section 2 for details.
S= Insert with Molded Step

FORM #1018-C Lift-All Rev.E 9/09
Copyright 2009