





Designed for use on aerial lift bucket trucks made by:

MBI Monzon Brothers, Inc

PLASTIC TECHNIQUES, INC.

MBI Crane & Hoist
Material Handling Products and Services

RO

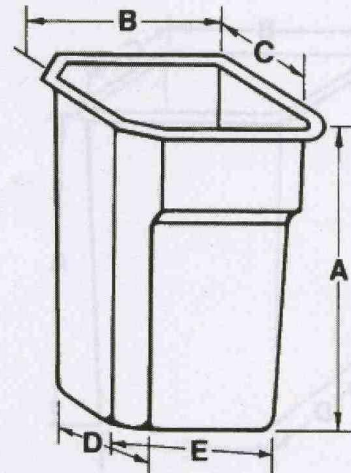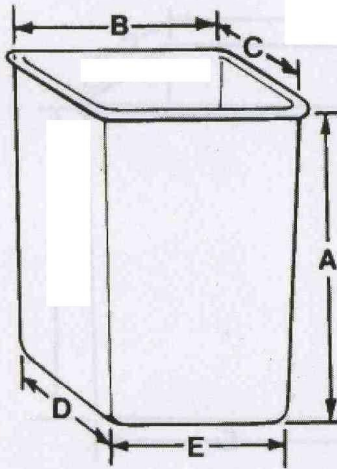

A is measured from the bottom of the rim to the base of the insert.
B & C measurements are taken one inch down from beneath the lip, on the outside of the insert.

D & E measurements are taken three inches up from the bottom, on the outside of the insert. This eliminates distortion due to the radius of the corners.

NOTE: All dimensions shown in chart below refer to the OUTSIDE of the insert, or INSIDE of the bucket. All measurements are rounded to the nearest half-inch.

ELECTRICAL INSULATING BUCKET INSERT SPECIFICATIONS

PTI MODEL#	MFG'S CODE	SHAPE	DIMENSIONS IN INCHES					NO. PER BOX	PTI ACCESSORY ITEMS		
			A	B	C	D	E		LIDS	SCUFF PADS	SCUFF PADS W/ STEP
RO-47	RO	Square	42	23	23	22	22	3	2L28	D-21	DS-6
RO-47S	RO	Square	42	23	23	22	22	3	2L28	D-21-N	DS-6
RO-49	RO	6-Sided	42	24.5	24	21	21	3	2W46N	D-23	DS-25

S=Insert with Molded Step